




Type	Width [mm]	Height [mm]	Depth [mm]	Connections spacing [mm]	Connectors distance from the wall [mm]	Brackets spacing [mm]	Heating surface [m <sup>2</sup> ]	Weight [kg]	Capacity [dm <sup>3</sup> ]	Power (75/65/20 °C) [W]	Power (75/65/24 °C) [W]	Power (55/45/24 °C) [W]	Electric heater maximal power [W]
	W	H	D	C	B	A							
D-408	450	776	92-112	400	45-65	250	0,61	6,5	3,2	360	324	159	300
DX-408	450	776	92-112	50	81-101	250	0,61	6,6	3,2	360	324	159	300
D-412	450	1154	92-112	400	45-65	250	0,91	9,5	4,8	531	478	231	300
DX-412	450	1154	92-112	50	81-101	250	0,91	9,6	4,8	531	478	231	300
D-417	450	1742	92-112	400	45-65	250	1,39	14,3	7,4	811	728	349	600
DX-417	450	1742	92-112	50	81-101	250	1,39	14,4	7,4	811	728	349	600
D-608	600	776	104-124	550	45-65	400	0,78	8,0	4,0	466	420	205	300
DX-608	600	776	104-124	50	93-113	400	0,78	8,1	4,0	466	420	205	300
D-612	600	1154	104-124	550	45-65	400	1,16	11,7	5,9	687	618	300	600
DX-612	600	1154	104-124	50	93-113	400	1,16	11,8	5,9	687	618	300	600
D-617	600	1742	104-124	550	45-65	400	1,77	17,8	9,1	1050	943	452	900
DX-617	600	1742	104-124	50	93-113	400	1,77	17,9	9,1	1050	943	452	900
D-808	750	776	120-140	700	45-65	550	0,95	9,6	4,7	570	513	251	300
DX-808	750	776	120-140	50	109-129	550	0,95	9,7	4,7	570	513	251	300
D-812	750	1154	120-140	700	45-65	550	1,42	14,1	7,1	839	755	367	600
DX-812	750	1154	120-140	50	109-129	550	1,42	14,2	7,1	839	755	367	600
D-817	750	1742	120-140	700	45-65	550	2,17	21,4	10,8	1282	1151	552	900
DX-817	750	1742	120-140	50	109-129	550	2,17	21,5	10,8	1282	1151	552	900


Horizontal tubes: 

Vertical manifolds: 

DX



D

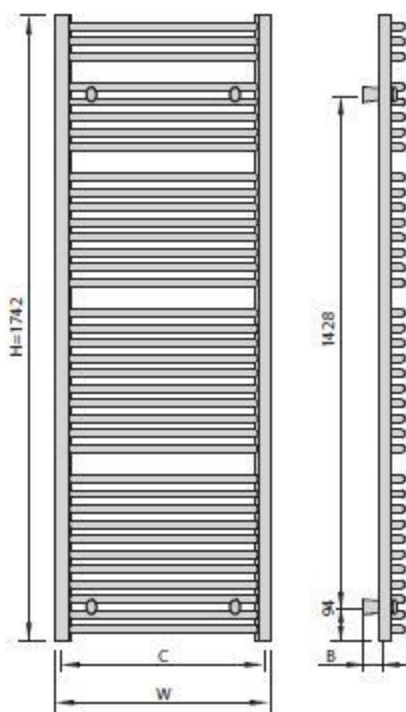

Finish and guarantee:

- standard: phosphatizing + polyester-epoxy lacquer;  
5 year guarantee;  
- on request: electrophoresis + polyester-epoxy lacquer;  
10 year guarantee;

Mounting brackets:

set for assembly on the wall; brackets in the colour of a towel rail

Valve:

for a separate order – page 25

Heater:

for a separate order – page 24

Accessories:

for a separate order – page 26

Working pressure:

10 bars

Maximal temperature:

95 °C

Connections:

4 15  
D  
1 18  
- inner threads G 1/2  
- air-vent plug G 1/2  
screwed in the upper  
hole of the collector,  
included

DX  
1 18  
MM  
- inner threads G 1/2  
- air-vent plug G 1/8  
hidden behind

Remarks:

lacquered towel rails in different colours than white have changed brackets' type and spacing.

